



14,7-56m



6-62,4m



24-90m





9,62x9,6m




180t



194t

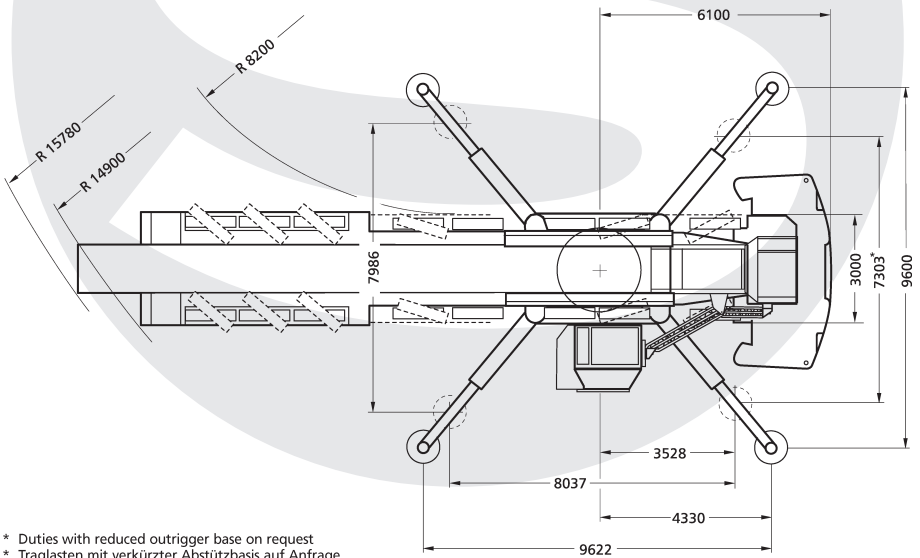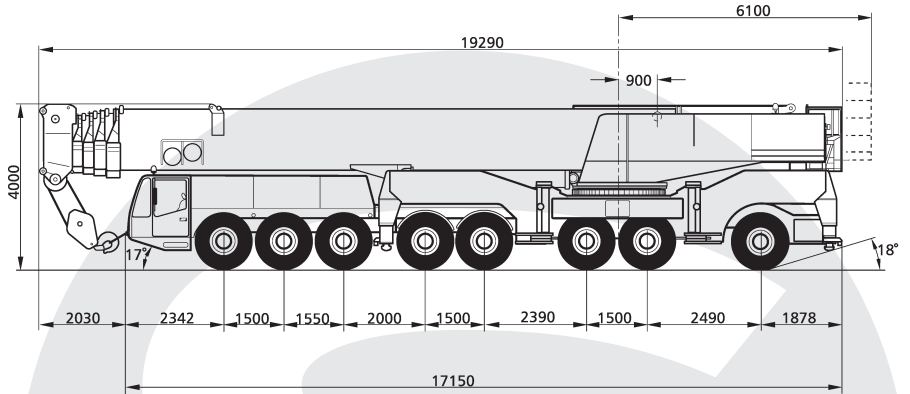

- * Duties with reduced outrigger base on request
- * Traglasten mit verkürzter Abstützbasis auf Anfrage
- * Capacités de levage avec base de calage réduite sur demande

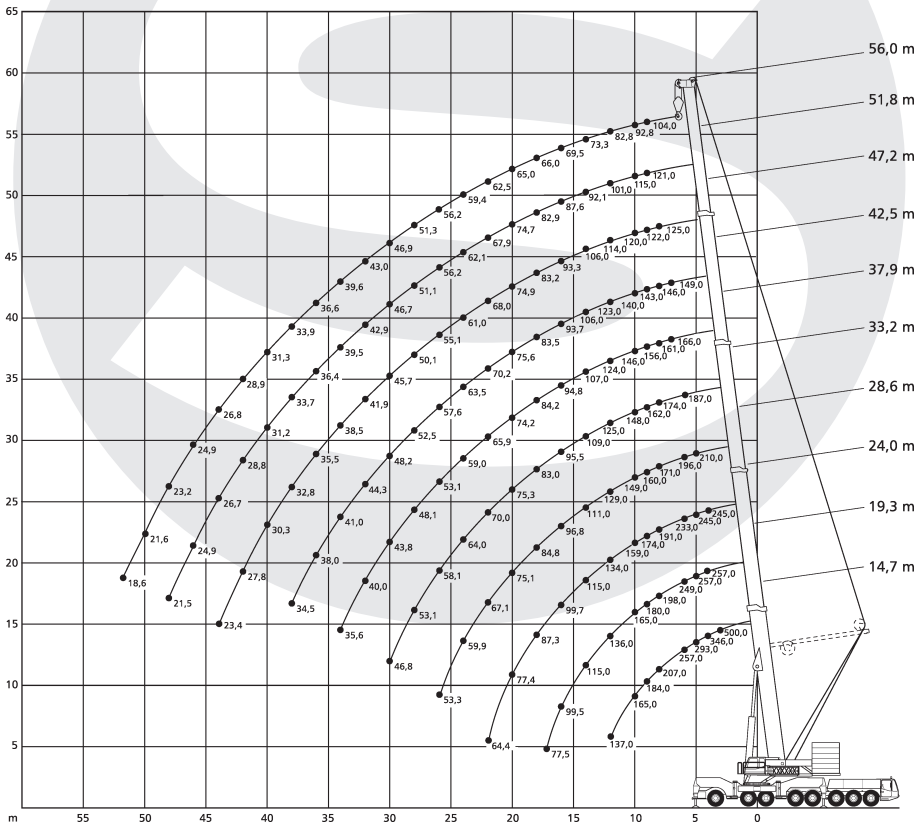



14,7-56m



9,62x9,6m



160t



360°



13000

	14,7 ¹⁾	14,7	19,3 ¹⁾	19,3	24 ¹⁾	24	28,6	33,2	37,9	42,5	47,2	51,8	56	
3	500°	257												3
3,5	381°	257	257	257										3,5
4	346°	257	257	257	245	245								4
4,5	317°	257	257	257	245	245								4,5
5	293°	253	257	252	245	245	210							5
6	257	224	249	224	233	224	196	166						6
7	231	201	221	201	211	201	184	156	142					7
8	207	182	198	182	191	182	171	146	134	117				8
9	184	166	180	166	174	166	160	138	125	110	95,3	82,9		9
10	165	153	165	153	159	152	149	130	118	104	89,9	78,6	66,8	10
12	137	131	136	131	134	130	129	115	103	93,5	80,4	71	61,2	12
14			115	112	115	111	111	102	91,1	84,1	72,5	64,4	56	14
16			99,5	97,2	99,7	95,9	96,8	90,5	80,9	75,8	65,9	58,7	51,2	16
18			75,9	77,5	87,3	83,9	84,8	80,5	72,8	68,5	60,2	53,7	46,9	18
20					77,4	74,2	75,1	72,5	66,1	62,1	55,1	49,4	43,1	20
22					64,3	64,4	67,1	66,2	60,2	56,5	50,7	45,5	39,7	22
24							59,9	61	55	51,6	46,7	42,1	36,7	24
26							53,3	54,6	50,3	47,3	43,2	39,1	34,1	26
28								49,1	46,2	43,6	40,2	36,4	31,8	28
30								44,4	42,5	40,4	37,6	34	29,8	30
32									39,4	37,8	35,4	32	28,1	32
34									36	35,2	33,3	30	26,3	34
36									32,9	31,6	28,5	24,8	21,8	36
38										30,3	29,8	26,9	23,3	38
40										28	28,2	25,6	22,1	40
42											26,3	24,3	20,8	42
44											24,5	23,1	19,8	44
46												22	18,7	46
48												20,9	17,8	48
50													17	50
52													16,2	52

1) 180 t Ballast, Zusatzabstützung und Doppelunterflasche erforderlich
° nach hinten

